



Cowl Panel Grille 76.10.01

Removal

1. Remove wiper arms and blades. Refer to Section <<501-16>>.

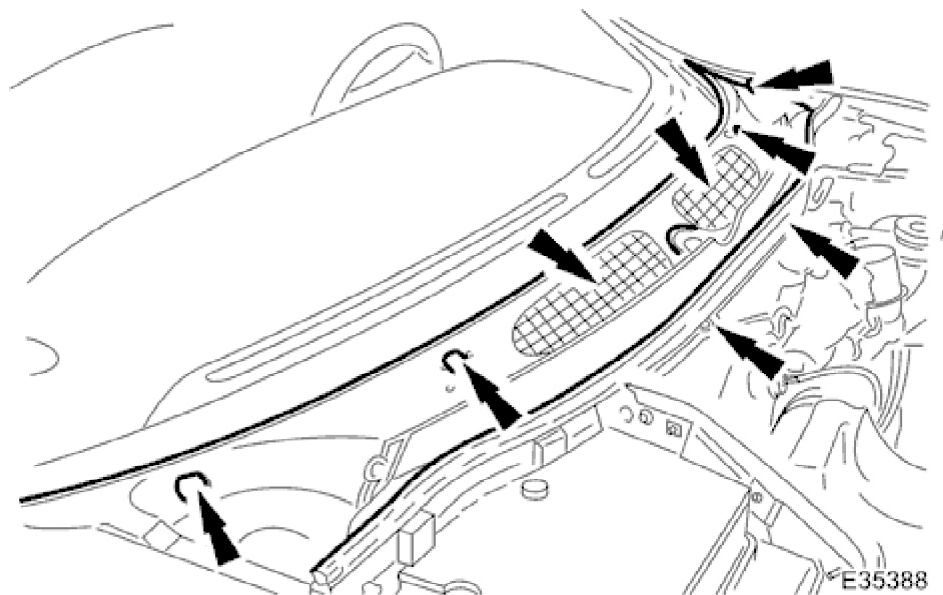

2. Remove cover retaining screws and fasteners.
 - Remove plastic covers from the rear screw locations.
 - Slacken and remove the eight plenum cover retaining screws and two plastic central fasteners.

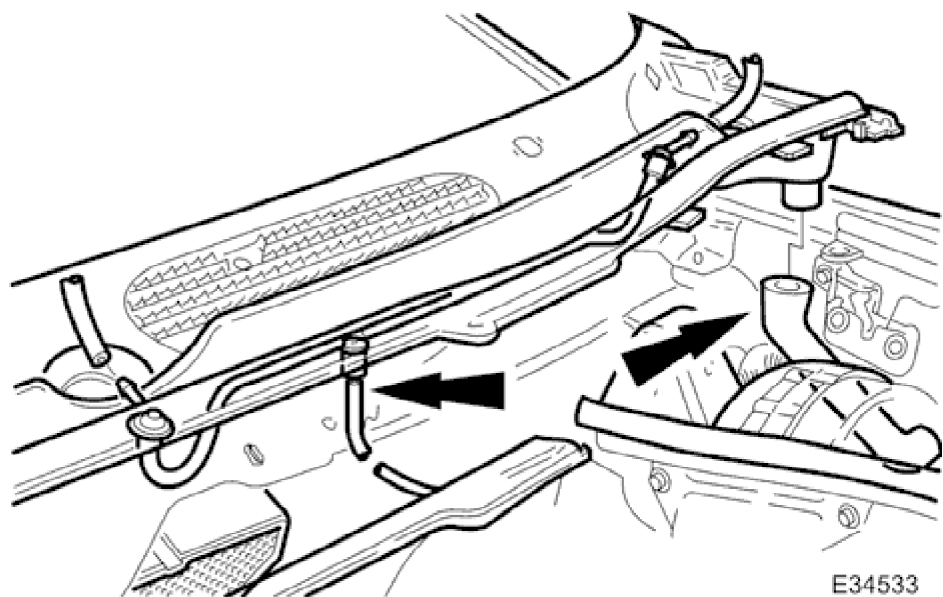

3. Disconnect and remove plenum cover.
 - Position plenum cover for access to drain hoses and screenwasher tubes.
 - Disconnect drain hoses and screenwasher tubes from plenum cover and remove plenum cover from vehicle.

2001 XK RANGE - Front End Body Panels - 501-02

Installation

1. Position plenum cover for access and connect drain hoses and screenwasher tubes.
2. Reposition and seat plenum cover.
3. Fit but do not tighten the retaining screws and plastic fasteners.
4. Commencing in the center, tighten the retaining screws and plastic fasteners.
5. Fit plastic covers over rear screw locations.
6. Fit wiper arms and blades. Refer to Section <<501-16>>.